



Installation Instructions

Step 1: Please decide if it is S-Trap installation or P-Trap installation.

***Rough in position of water inlet, waste outlet and floor fixing bracket holes. Ensure inlet connection extends 25mm from finished wall.**

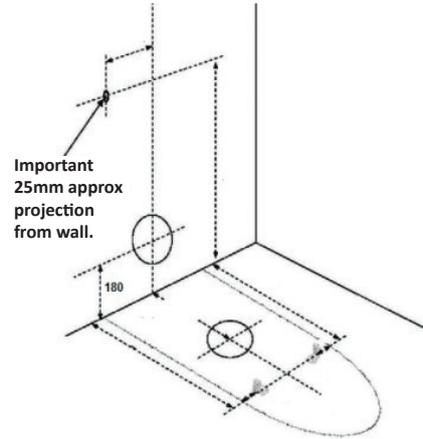

S-Trap installation:

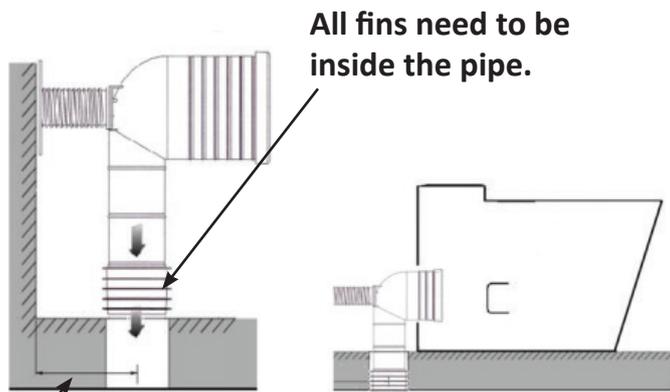


Set out range refer to toilet specification.

***Lubricate the fins of the pan bend and position into waste pipe.**


***Lubricate rubber on the exposed connector end.**

P-Trap installation:

***Please measure existing toilet pan to setup P-Trap from wall to spigot distance.**
***Setup waste pipe and the end of the pan collar extends approx minimum of 50mm onto spigot.**

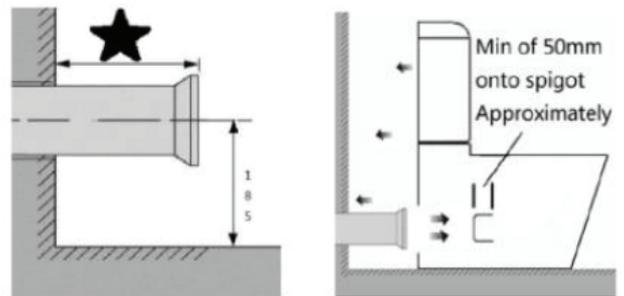

Step 2: Do the below installation for the cistern fixing.

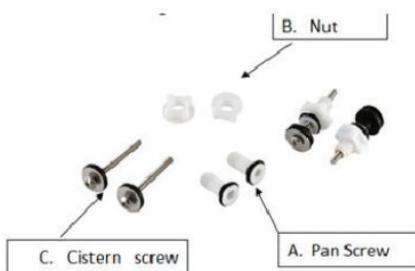

(Fig 1)

Pan Screw Hole

Pan Recess


***Place rubber seal into pan recess.**

***Press Pan Screw A into the pan screw hole.**

***Use Nut B to tight Pan Screw A underneath the pan. (Refer to Fig 1)**

***Place Cistern Screw C into holes on the inside of cistern, making sure washers are located correctly.**


Step 3:

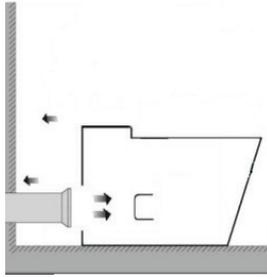

***Align and push toilet pan back to the wall. Bucket flush and check for leaks.**


Step 4: Choose back inlet or bottom inlet.

For back inlet

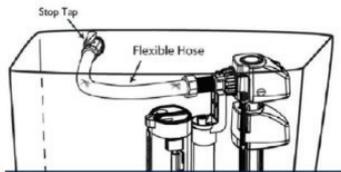


Fit off stop tap then connect rear water inlet valve to stop tap. Fill cistern and ensure correct water level.

For bottom inlet

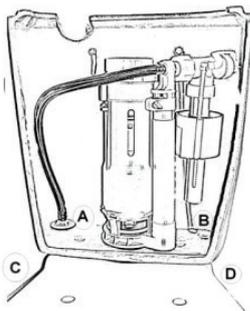

Remove cap from cistern plug A or B at base cistern. Connect flexible hose to cistern plug A or B depending on location of stop tap. Complete stop tap connection to underside of cistern plug A or B. Fill cistern and ensure correct water level. Note: Inlet valve can be adjusted if required.

Step 5:

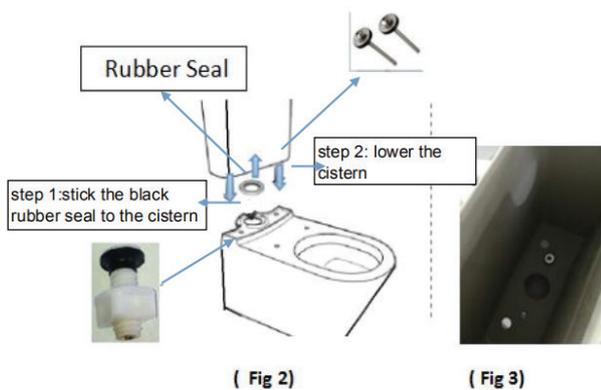

***Before fitting cistern to ensure all cistern seal nuts are tight.**

***Gently lower cistern onto pan locating fixing screw into matching pan screw holes. Note: before tightened fully, make sure cistern sits square and straight to pan. (Fig2, Fig3)**

***Turn on water supply, flush the toilet to check for leaks before completing the installation.**

Due to the design, weight and stability of the pan and cistern, a silicone adhesive only is recommended and excepted by manufacturer for floor based fixing.